


PATCH CORD SC/APC-SC/APC SM SX 3.0 LSZH 3M

$$L=X+100/0\text{mm}$$

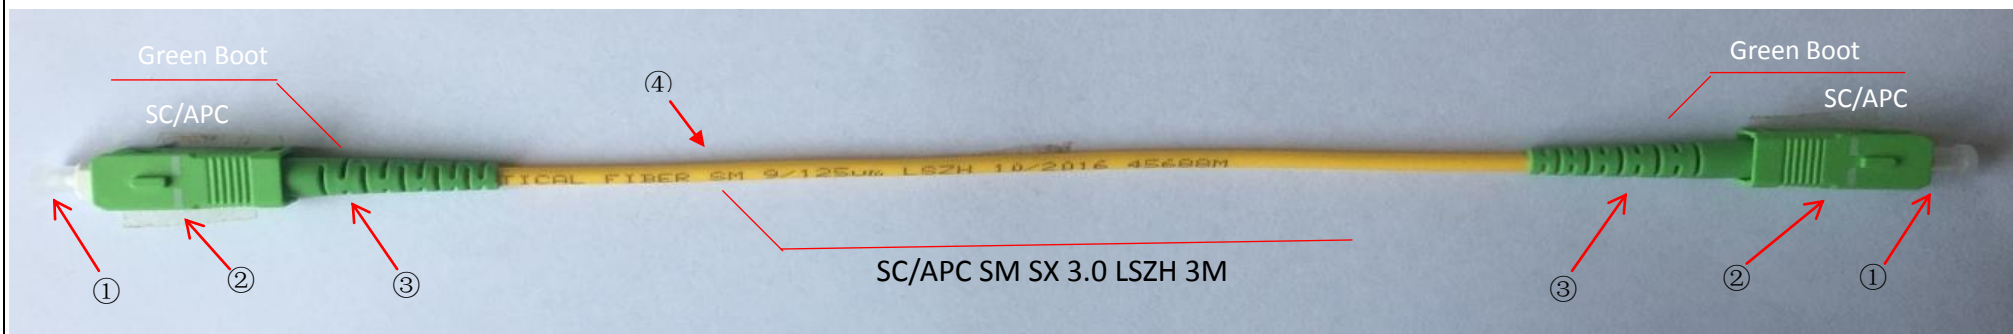

Patch cord Length	
Length(M)	Tolerance(M)
0<L<1.0	±0.05
1.0m ≤ L<20m	±0.10
20m≤L	±1%XL

Note:

1. Insertion Loss:<0.3dB@850nm
2. End surface test is according to OP-03-05001
3. Test standard: gr-326-CORE
4. Test report has to match the serial No
5. ROHS Compliant
6. Fiber cable according to IEC 60793-2
7. LC connector according to IEC61754-20

④	SM 9/125 Simplex 3.0 LSZH Cable(Yellow)	3M	
③	SC 3.0 Boot(Green)	2	
②	SC/APC Simplex Connector SM ∅3.0mm(Green)	2	
①	SC Dust Cap (Transparent)	2	
NO	Part name	QT' Y	REMARK

SC-SC SM 3M	PATCH CORD SC/APC-SC/APC SM SX 3.0 LSZH 3M		
Part No.	DESCRIPTPONS		
CUSTOMER		ITEM NO.	