


PATCH CORD SC-SC SM DUPLEX 3.0MM G652D LSZH 3~25M

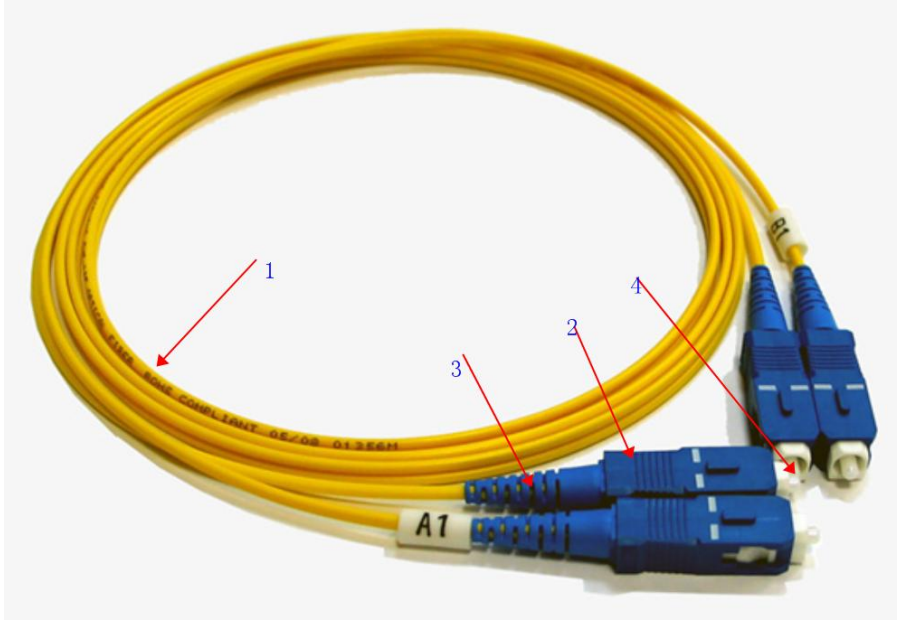

Note:

1. Insertion Loss:<0.3dB
2. End surface test is according to OP-03-05001
3. Test standard: gr-326-CORE
4. Test report has to match the serial No.
5. ROHS Compliant
6. Fiber cable according to IEC 60793-2
7. SC connector according to IEC61754-20

|                   |              |
|-------------------|--------------|
| Patch Cord Length |              |
| Length(m)         | Tolerance(m) |
| 0<L<1.0           | ±0.05        |
| 1.0m ≤ L<20m      | ±0.10        |
| 20m≤L             | ±1%XL        |

|                                  |    |
|----------------------------------|----|
| 1.SM G652D Duplex 3.0 LSZH Cable | 3M |
| 2.SC Connector SM Ø3.0mm         | 4  |
| 3. SC 3.0 Boot                   | 4  |
| 4.SC Dust Cap (Transparent)      | 4  |
| Part name                        |    |

|                                    |              |            |                             |
|------------------------------------|--------------|------------|-----------------------------|
| SC-SC                              | SM           | PATCH CORD | SC-SC SM DUPLEX 3.0MM G652D |
| G652D 3M                           |              | LSZH 3M    |                             |
| Part No.                           | DESCRIPTPONS |            |                             |
| SHANHAI TANGPIN TECHNOLOGY CO.,LTD |              |            |                             |
| CUSTOMER                           |              |            |                             |