


## Cross Section

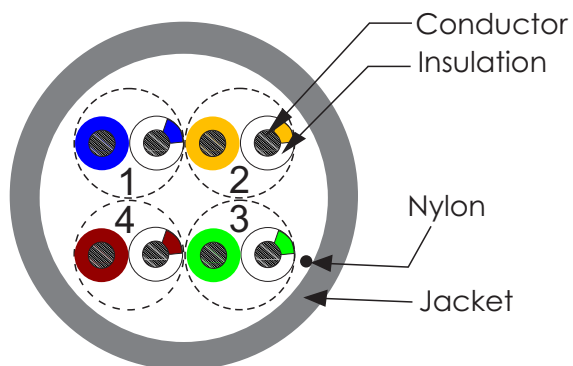

### Insulation Color

1. Blue&White / Blue
2. Orange&White / Orange
3. Green&White / Green
4. Brown&White / Brown

## Cable Sólido UTP Cat 5e CCA Uso interior



- Recomendado para transmitir**
- \* VIDEO Entre 1 -100 mts
  - \*\* POWER 12 VDC 1A Entre 1 - 30 mts
  - \* Usando 2 pares
  - \*\* Usando 2 pares + borneras

## VIC-005-UI-305

Cable UTP, Categoría 5e, 26 AWG

## Presentación

Caja por **305** metros - Ref. **VIC-005-UI-305**  
Rollo por **100** metros - Ref. **VIC-005-UI-100**

### Especificaciones

Conductor	Material	CCA
	Size	26 AWG * 4P
	Construction	1/0.40 +/- 0.01 MM
Insulation	Material	PE
	Avg. Thickness	0.22 MM
	Min. Thickness	0.21 MM
	Diameter	0.85 +/- 0.01 MM
Inner Layer	Direction	S
	Pitch	30 mm underneath
Outside Layer	Direction	S
	Pitch	200 mm underneath
Separate	Material	
	Construction	
Filler	Material	Nylon
	Construction	
Jacket	Material	PVC
	Avg. Thickness	0.55 MM
	Min. Thickness	0.48 MM
	Diameter	5.0 +/- 0.15 mm
	Color	Optional
Solid Conductor Resistance		<= 26,5 Ohm / 100 mt at 20° C
Insulation Resistance		Min 500 mega ohm - Km at 20 C
Dielectric Test		1000 V DC/1 min; no Breakdown
Rating Temperature		60 C
Voltage Rating		30 V



ANSI/EIA/TIA 568B - ISO/IEC 11801

