


BNC Female to BNC Female Connector Adapter (BNC-50KKB2)

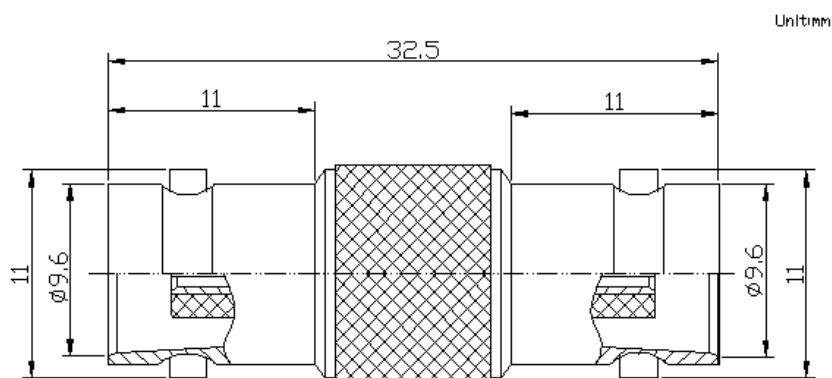

Interface

According to

IEC 61169-8

Electrical

Characteristic Impedance

50ohm

Frequency Range

DC-4GHz

VSWR

$\leq 1.20 @ DC-2000MHz$

Dielectric Withstanding Voltage

$\geq 1500V$ RMS,50Hz,at sea level

Working Voltage

$\leq 500V$ RMS,50Hz,at sea level

Dielectric Resistance

$\geq 5000M\Omega$

Contact Resistance

Center Contact $\leq 1.5m\Omega$

Outer Contact $\leq 1.0m\Omega$

Mechanical

Durability

Mating cycles ≥ 500

Material and plating

Body

Material

Brass

Plating

Ni

Insulator

PTFE

-

Center conductor

Phosphor bronze

Au

Environmental

Temperature Range

$-55^{\circ}C \sim +155^{\circ}C$

RoHS

Compliant