


N Male to UHF Female(SO239)Connector Adapter(N/UHF-JKV)

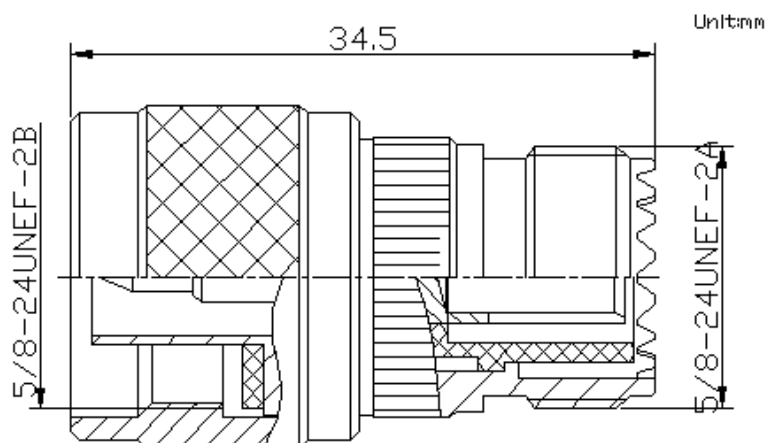

Interface

According to

IEC 61169-16/ IEC 60169-12

Electrical

Characteristic Impedance

50 ohm

Frequency Range

DC- 2GHz

VSWR

$\leq 1.20 @ DC-300MHz$

Insertion Loss

$\leq 0.10dB$

Dielectric Withstanding Voltage

$\geq 1500V$ RMS,50Hz,at sea level

Working Voltage

$\leq 750V$ RMS,50Hz,at sea level

Dielectric Resistance

$\geq 5000M\Omega$

Mechanical

Durability

Mating cycles ≥ 500

Material and Plating

Parts Name

Material

Plating

Body

Brass

Ni

Insulator

POM

—

Center conductor

Brass

Au

Coupling nut

Brass

Ni

Gasket

Silicone rubber

—

Environmental

Temperature Range

$-55^{\circ}C \sim +125^{\circ}C$

RoHS

Compliant